


ORCA<sup>TM</sup>

MODEL OG50 - Low Profile

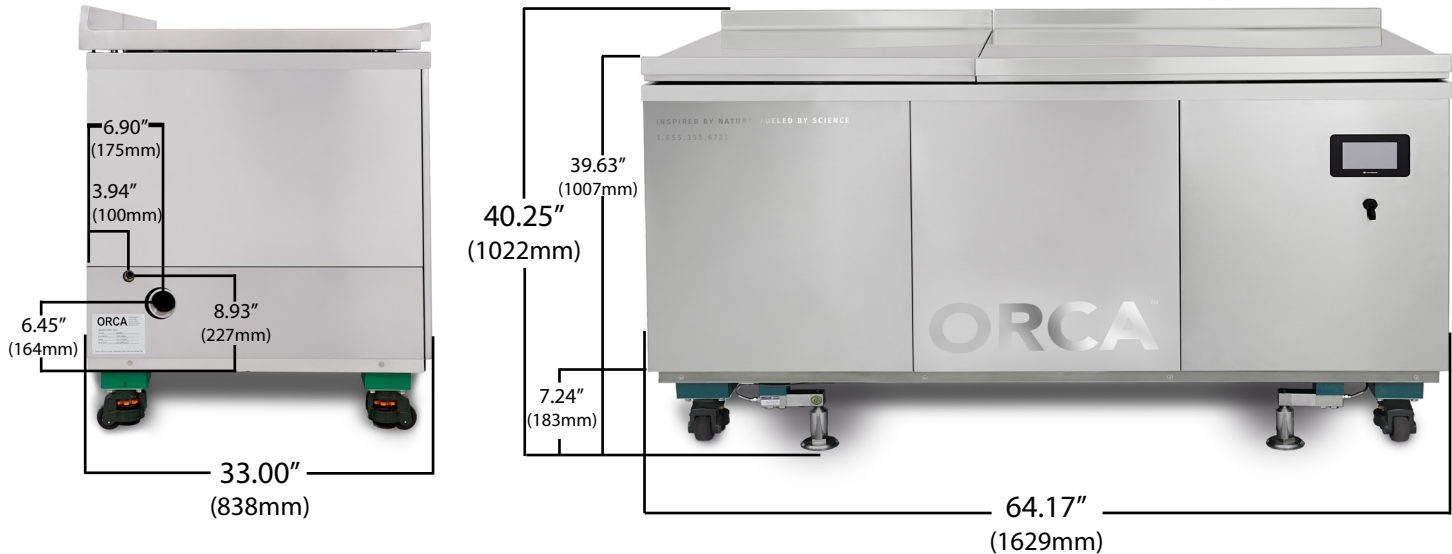

MODEL OG50 - Low Profile SPECIFICATIONS

Height may differ by 5cm

<b>REQUIRED SUPPLIES</b> ORCA Biochips, ORCA microorganisms & ORCA wipers from ORCA Digesters	<b>DIMENSIONS</b> L 64.17" x W 33.00" x H 40.25" (L 1629mm x W 838mm x 1022mm)
<b>WEIGHT OF ORCA</b> 1235 lbs	<b>HOURLY PROCESSING CAPACITY</b> Average of 50 lbs per hour
<b>ELECTRICAL CONSUMPTION</b> 1.2 kwh	<b>WATER CONSUMPTION</b> 114 gallons (430 liters) per day* <small>*Calculated based on an incoming flow rate of 2 gallons (7.6 liters) per minute*</small>
<b>INSTALLATION REQUIREMENTS</b> Electrical - Dedicated 120V / 220V Electrical Cord Length - 118.11" Water - Male GHT cold water connection Drain - Min. 2.5" sanitary drain complete with grease interceptor	

FEATURES

<ul style="list-style-type: none"><li>Aerobically processes an average of 50 lbs of food waste per hour</li><li>On-board scales for diversion tracking, with an extractable data file through Ethernet or USB</li><li>Online customer portal for diversion goal tracking and reporting</li><li>Flat top work surface for optimal space efficiency</li><li>Food waste can be added continuously until maximum capacity is reached</li></ul>	<ul style="list-style-type: none"><li>Safety control turns off machine when door is opened</li><li>Engineered for quiet operation, with a touch screen HMI</li><li>Utilizes ORCA Biochips to hold high levels of microorganisms that digest organic waste</li><li>Effluent from machine tested safe to enter wastewater system</li><li>Food grade stainless steel construction</li></ul>
--	--

NSF