


ORCA™ MODEL OG50 - Low Profile

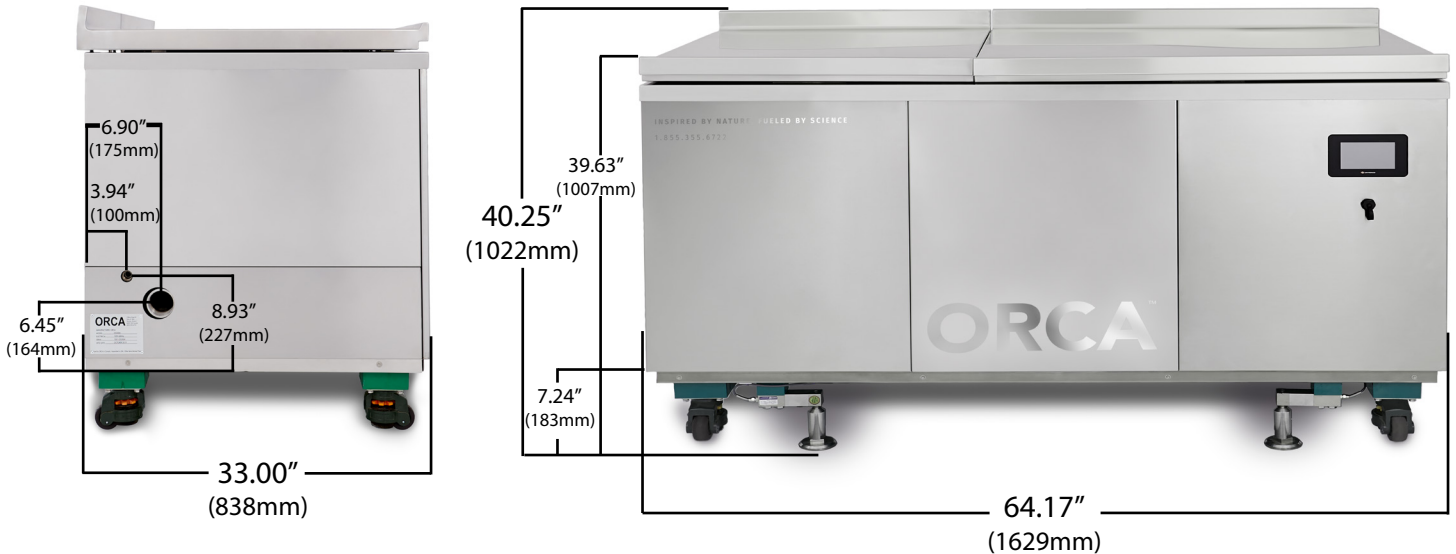

MODEL OG50 - Low Profile SPECIFICATIONS

Height may differ by 5cm

<p>REQUIRED SUPPLIES ORCA Biochips, ORCA microorganisms & ORCA wipers from ORCA Digesters</p>	<p>DIMENSIONS L 64.17" x W 33.00" x H 40.25" (L 1629mm x W 838mm x 1022mm)</p>
<p>WEIGHT OF ORCA 1235 lbs</p>	<p>HOURLY PROCESSING CAPACITY Average of 50 lbs per hour</p>
<p>ELECTRICAL CONSUMPTION 1.2 kwh</p>	<p>WATER CONSUMPTION 114 gallons (430 liters) per day* <small>*Calculated based on an incoming flow rate of 2 gallons (7.6 liters) per minute*</small></p>
<p>INSTALLATION REQUIREMENTS Electrical - Dedicated 120V / 220V Electrical Cord Length - 118.11" Water - Male GHT cold water connection Drain - Min. 2.5" sanitary drain complete with grease interceptor</p>	

FEATURES

- Aerobically processes an average of 50 lbs of food waste per hour
- On-board scales for diversion tracking, with an extractable data file through Ethernet or USB
- Online customer portal for diversion goal tracking and reporting
- Flat top work surface for optimal space efficiency
- Food waste can be added continuously until maximum capacity is reached
- Safety control turns off machine when door is opened
- Engineered for quiet operation, with a touch screen HMI
- Utilizes ORCA Biochips to hold high levels of microorganisms that digest organic waste
- Effluent from machine tested safe to enter wastewater system
- Food grade stainless steel construction

