

# Important Information

## V-Press 610 eco

**Baling press model HSM V-Press 610 eco**  
HSM order number: 6110124

*Double door with handwheel door lock*  
*incl. operating manual/declaration of conformity*



Motor	3,0 kW
Voltage / Frequency	3 x 400 V / 50 Hz
Pressing power	120 kN
Machine weight	540 kg
Hourly output	approx. 3 - 6 bales
bale weight (material-dependant)	up to 100 kg
Maximum bale size	L 800 x W 600 x max. H 600 mm
Dimensions of machine	W 1190 x D 815 x H 1980 mm
Dimensions of machine for transport	W 1190 x D 815 x H 1980 mm
Transit clearance	W 850 x H 2010 mm

All technical data and dimensions are approximate values. Technical and design modifications reserved.

- Large loading aperture for safe and easy operations
- State-of-the-art microprocessor controller and membrane keypad with LED display, which show the current status of the machine
- Pressing procedure starts automatically upon closing the door, upon opening the door, a security switch assures an automatic stop of the pressing procedure
- Low-maintenance, durable hydraulics reduce overheads
- Mechanical bale ejector
- Semi automatic 3-fold strapping with polyester tape
- Basic equipment: 3 rolls of polyester tape

### Consumable materials:


Strapping tape WG 40

HSM order number: 6212993010




# Dimensions and space requirement

## V-Press 610 eco

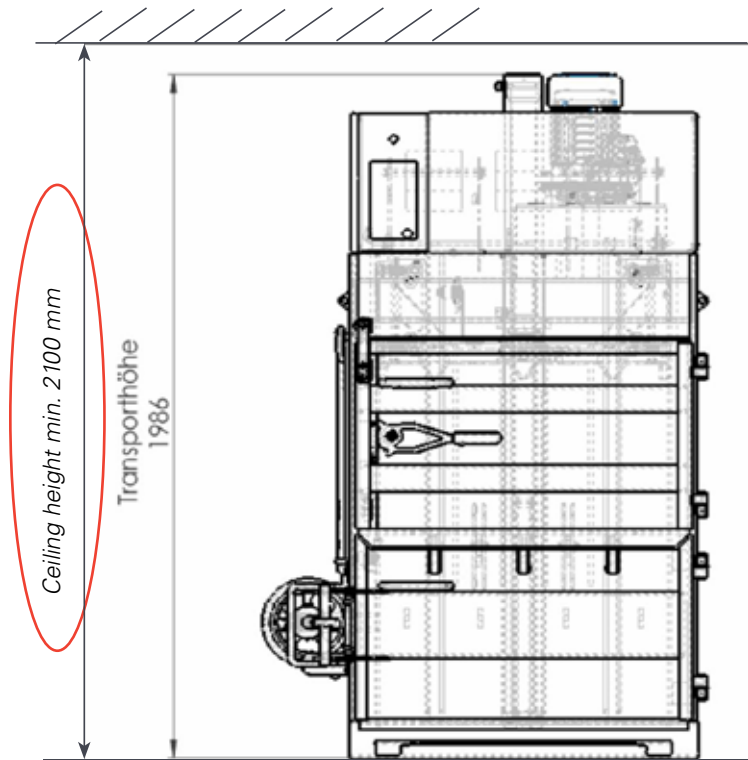

All technical data and dimensions are approximate values. Technical and design modifications reserved.

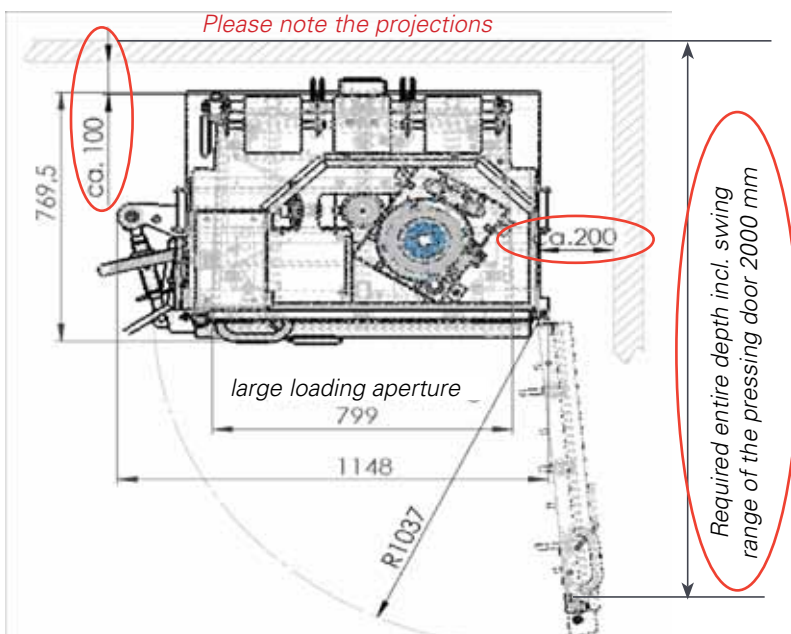

## ***Movement to the place of installation***

### ***V-Press 610 eco***

- *Is there a stair / a higher ledge on the way to the place of installation ?  
(an at-grade insertion has to be ensured)*
- *Has the press to be transported with an elevator / a lift ?  
(loading capacity min. 500 kg)*



*minimum sizes of the doors / passages*

- *Is the potential floor loading adequate for the machine?*



*floor loading max. = 250 kg per m<sup>2</sup>  
(bale weight enclosed)*

## **Electrical connection**

### **V-Press 610 eco**

<i>Rated power</i>	<i>3,0 kW</i>
<i>Operating voltage U</i>	<i>400 V</i>
<i>Frequency</i>	<i>50 Hz</i>
<i>Rated current I<sub>n</sub></i>	<i>6,5 A</i>
<i>Battery backup</i>	<i>3 x 16 A (K, C-characterise)</i>
<i>Connector plug</i>	<i>CEE 3 x 16 A + N + PE</i>
<i>Lenght of power supply</i>	<i>approx. 3000 mm</i>

All technical data and dimensions are approximate values. Technical and design modifications reserved.

