


## POWER BEAR PENDULUM COMPACTOR "WET WASTE SPECS"

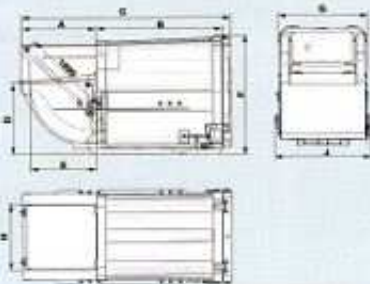

Dimension / Dim	Reducer x4		
	8	10	12
A mm	1500	1900	1500
B mm	2450	2700	2970
C mm	4150	4400	4710
D mm	1500	1500	1500
E mm	1400	1400	1400
F mm	2500	2500	2500
G mm	1870	1870	1870
H mm	1400	1400	1400
J mm	2015	2015	2015
Weight / kg	3150	3430	3650

### Pendulum Compactor x4, "wet waste specs"

- Mobile compactor for chain loader systems,
- Smoothline construction, conical shape
- Control panels safely installed on left and right side
- "Wet waste" fully liquid proof
- Header and body welded in one piece
- Feed opening 1400 x 1000 mm
- The compactor is especially designed for compacting of waste with high liquid quote (e.g. kitchen waste, fruits and vegetables)
- Primed and coated in RAL colour of your choice


### Standard equipment

- Lid installed front sides
- Automatic phase inverter relay
- Cleanout door liquid proof
- 80 % fill level signal


### Technical data

Actuating power .....	5,5 KW
Fuse protection .....	16 A delay
Power supply .....	400 V / 50 Hz
Hopper height .....	1480 mm
Feed opening .....	1400 x 1000 mm
Piston capacity / stroke ...	1,9 m <sup>3</sup>

### Operating principle



The pendulum plunger presses, with each pre stroke cycle, the material in front of it into to the body. With the back stroke, material behind the plunger falls in front of the pendulum plunger. With this technology, the compactor can be filled without any interruption. The pendulum plunger cleans itself by passing a wiper with each stroke.



Compactor after compaction cycle.