

Important Information

HSM V-Press 825 plus

Vertical baling press

Model: HSM V-Press 825 plus

Loading flap with hand wheel door lock
incl. operating manual / declaration of conformity

- Robust mechanical bale ejector belt for easy bale removal
- Special hydraulic cylinders with hard-chrome plated pistons reduce wear, prevent breakdowns and prolong service life
- Low installation height and small footprint
- High process reliability due to HSM TCS (TorsionControlSystem)
- Basic equipment: 4 rolls of polyester tape



Pressing power in kN	250
Motor in kW	4
Voltage / Frequency	3 x 400 V / 50 Hz
Loading aperture W x H in mm	1195 x 530
Bale weight in kg (depending on material)	up to 280
Bale size L x W x H in mm	1200 x 780 x max. 700
Hourly output in bales	2-5
Cycle time in idle operation (theor.) in sec.	39
Acoustic level in dB(A)	62.5
Press chamber size W x D x H in mm	1200 x 780 x 1300
Dimensions of machine* W x D x H in mm	1700 x 1046 x 2370
Transport dimensions of machine** W x D x H in mm	1700 x 1046 x 1950
Machine weight in kg	1063
Strapping	4-fold with polyester tape

*External dimensions of the machine when set up for operation.

**With tape station


HSM®

Great Products, Great People.

Dimensions and space requirement


HSM V-Press 825 plus

Ceiling height min. 2400 mm

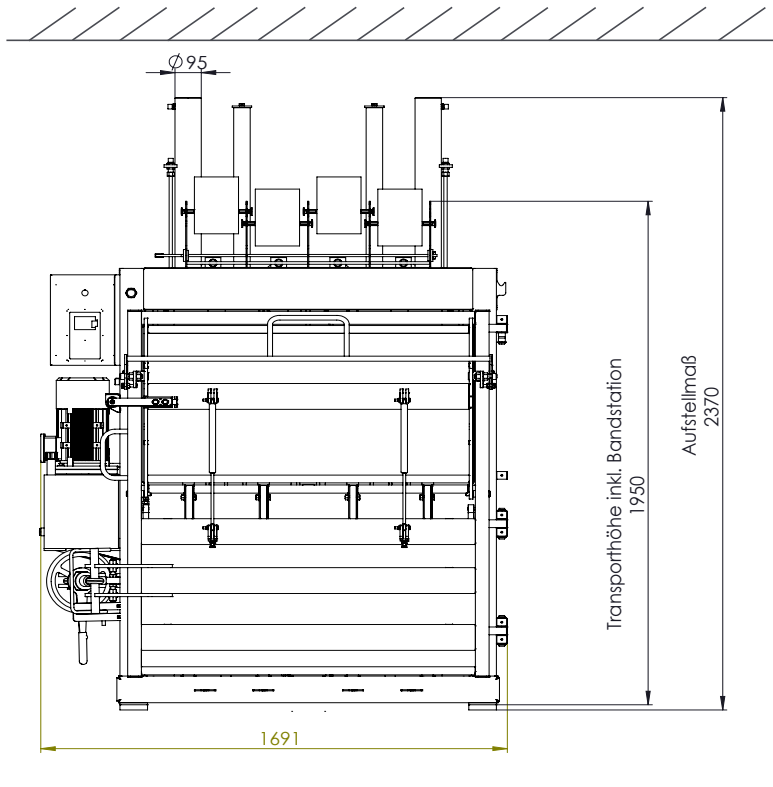

It is possible to dismantle the strapping station. Then the transport height is 1735 mm.

Please note the projections!

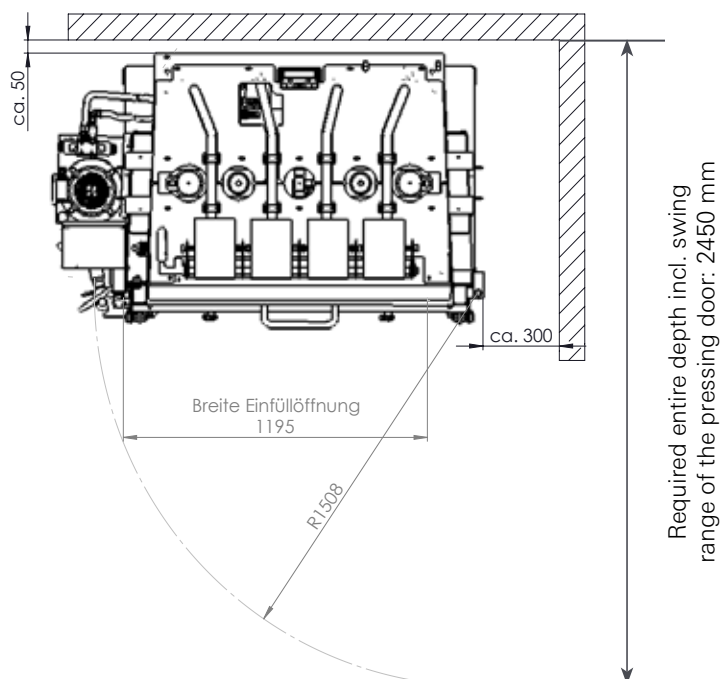

Delivery and installation

HSM V-Press 825 plus

Delivery by truck:

- Is the place of delivery easily to access?
If NO – why not? _____
_____ ☐ yes ☐ no
- Do you have to cross a pedestrian zone for the delivery? ☐ yes ☐ no
- Has the truck to go through a gate for the delivery?
(Dimensions of the gate: _____) ☐ yes ☐ no
- Is there a truck loading ramp? (Height: _____) ☐ yes ☐ no
- Is a truck with an liftgate needed? ☐ yes ☐ no
- Is there a forklift truck available? (Lifting power: _____) ☐ yes ☐ no
- Is there a need to deliver without a trailer? ☐ yes ☐ no
- Are there limited delivery hours? ☐ yes ☐ no

Movement to the place of installation:

Is there a stair / a higher ledge on the way to the place of installation?
(an at-grade insertion has to be ensured)

☐ yes ☐ no

Has the press to be transported with an elevator / a lift?
(loading capacity min. 1,1 t)

☐ yes ☐ no

Are the dimension of the doors high enough for the movement of the machine? (dimensions as pictured)

☐ yes ☐ no

If not: width: _____ height: _____

Is the potential floor loading adequate for the machine?
(floor loading max. = 500 kg per m², bale weight enclosed)


☐ yes ☐ no

Is the place of installation with basement?

☐ yes ☐ no

Is there a ceiling height of in minimum 2,40 m?

☐ yes ☐ no

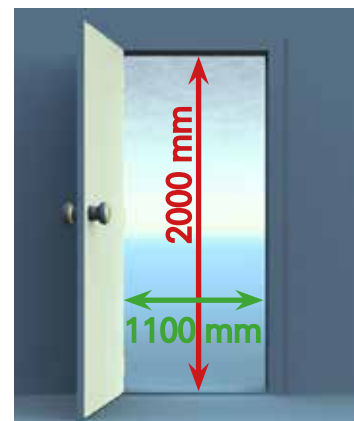

Minimum sizes of the doors / passages

Electrical connection HSM V-Press 825 plus

Rated power	4.0 kW
Operating voltage U	400 V
Frequency	50 Hz
Rated current I _n	8.5 A
Battery backup	3 x 16 A (K-, C-, gL-characterise)
Connector plug	CEE 5 x 16 A 6 H
Length of power supply	approx. 3000 mm



Is there an electrical connection with the mentioned values at the place of installation?

☐ yes ☐ no

Consumable materials HSM V-Press 825 plus



Strapping tape WG 40

order number: 6212 993 010

Do you have any questions?

You can reach us on Phone: +971 4885 4249, Fax: +971 4885 1102,

Email: sales@germandistribution.com

Contact person:

Telephone:

Delivery address:

Place / Date / Customer signature:

HSM®

Great Products, Great People.