

Delivery and installation

HSM V-Press 825 plus

Delivery by truck:

- Is the place of delivery easily to access?
If NO – why not?
_____ yes no
- Do you have to cross a pedestrian zone for the delivery? yes no
- Has the truck to go through a gate for the delivery?
(Dimensions of the gate: _____) yes no
- Is there a truck loading ramp? (Height: _____) yes no
- Is a truck with an liftgate needed? yes no
- Is there a forklift truck available? (Lifting power: _____) yes no
- Is there a need to deliver without a trailer? yes no
- Are there limited delivery hours? yes no

Movement to the place of installation:

Is there a stair / a higher ledge on the way to the place of installation?
(an at-grade insertion has to be ensured)

yes no

Has the press to be transported with an elevator / a lift?
(loading capacity min. 1,1 t)

yes no

Are the dimension of the doors high enough for the movement of the machine? (dimensions as pictured)

yes no

If not: width: _____ height: _____

Is the potential floor loading adequate for the machine?
(floor loading max. = 500 kg per m², bale weight enclosed)

yes no

Is the place of installation with basement?


yes no

Is there a ceiling height of in minimum 2,40 m?

yes no



Floor loading max. = 500 kg per m²
(bale weight enclosed)

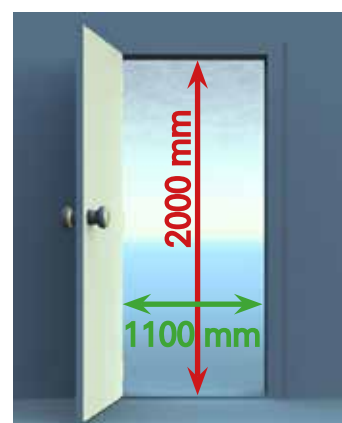

Minimum sizes of the doors / passages

Electrical connection HSM V-Press 825 plus

Rated power	4.0 kW
Operating voltage U	400 V
Frequency	50 Hz
Rated current I _n	8.5 A
Battery backup	3 x 16 A (K-, C-, gL-characterise)
Connector plug	CEE 5 x 16 A 6 H
Length of power supply	approx. 3000 mm



Is there an electrical connection with the mentioned values at the place of installation?

yes no

Consumable materials HSM V-Press 825 plus



Strapping tape WG 40

Power Bear order number: 6212 993 010

Do you have any questions?

Your Power Bear contact person is glad to help! Tel.: +971 4 885 4249 Fax: -1102

Contact person: _____

Telephone: _____

Delivery address: _____

Place / Date / Customer signature:
